




TLS-15T-DUO-SET [↗](#)

Hydraulic wedge spreader

BETEX TLS Duo set, for lifting loads and spreading 2 components

Información técnica

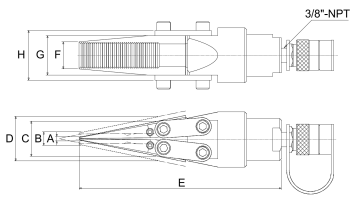

Variante de su producto actual

| Version | DS | Duo set |
|---------|----|---------|
| | | |

Datos técnicos

| | | |
|----|---------|-----------------------|
| | 15 (2x) | Capacity class (tons) |
| | 25 mm | Stroke cylinder |
| | 700 bar | Operating pressure |
| A | 5 mm | |
| B | 15 mm | Spread, max. |
| C | 36 mm | |
| D | 46 mm | |
| E | 232 mm | |
| F | 31 mm | |
| G | 45 mm | |
| H | 57 mm | |
| ≈m | 26 kg | Peso |



Información adicional

Hardened steel jaws, vertical lifting to exact position, use in narrow spaces from 5 to 43 mm, can be operated by one person

Product specifics

for industrial maintenance and repair jobs

Usability

2 wedge spreaders, two-stage hand pump with double manifold, 2x hose with quick coupling set, 2x stepped safety block, 2x pressure gauge, 2x T-piece, steel box

Delivery scope