**LFS25-M** [↗](#)

Carril-guía

hollow section profile, with fixing slots, with two raceway shafts; corrosion-resistant design possible



Información técnica



Variante de su producto actual

Size code	25	
Ejecución	M	Hollow section profile, with fixing slots

Medidas principales y datos de rendimiento

h	46 mm	Height
b	25 mm	Width
l _{max}	4.000 mm	Length maximum
I _y	314.429 mm ⁴	Second moment of area
I _z	186.693 mm ⁴	Second moment of area
LF _Q	1.156 mm ²	Cross-sectional area
W _y	11.230 mm ³	Wider resistance torque
W _z	9.623 mm ³	Wider resistance torque

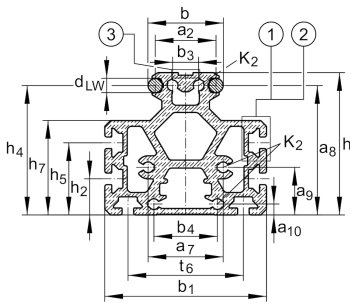



Medidas

a ₂	19 mm	Distance
b ₁	56 mm	Anchura
b ₅	5,2 mm	Width
d _{LW}	6 mm	Diameter
e _Z	19,4 mm	Distance
h ₂	22 mm	Height
h ₄	41,6 mm	Height
h ₇	31,5 mm	Height
K ₂	4,65 mm	Diameter
t ₆	30 mm	Depth
t ₇	1,6 mm	Depth