**KUVS10-B**

Patin con recirculación a bolas

linear recirculating ball bearing units for guideway with raceways on both sides

Información técnica

Variante de su producto actual

Size code 10

Suffix B

Medidas principales y datos de rendimiento

H 11 mm Height system

B 51,6 mm Width system

L 47 mm Length linear recirculating ball bearing units

h 10 mm Height rail





b 31,8 mm Width rail

l_{max} 1.960 mm Max. length rail

C 5.700 N Load capacity dyn C

C₀ 10.600 N Load capacity dyn C₀M_{0X} 203 Nm Moment ratings M_{0X}M_{0Y} 51 Nm Moment ratings M_{0Y}M_{0Z} 51 Nm Moment ratings M_{0Z}

≈m 24,836 g Peso

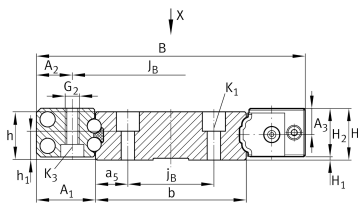



Medidas de montaje

A ₁	9,9 mm	
A ₂	5,5 mm	
J _B	40,6 mm	
j _B	18 mm	
a ₅	6,9 mm	
L ₁	29,8 mm	
J _L	15 mm	
j _L	40 mm	
a _{Lmin}	20 mm	
a _{Lmax}	34 mm	
a _{Rmin}	20 mm	
a _{Rmax}	34 mm	
H ₁	0,5 mm	
H ₂	10,5 mm	Height linear recirculating ball bearing units
A ₃	6 mm	
h ₁	3,4 mm	
K ₁	M3	Thread
K _{1 MA}	2,5 Nm	Tightening torque
G ₂	M3	Thread
G _{2 MA}	1,5 Nm	Tightening torque
d ₁	3,8 mm	Diameter

Productos relacionados

TKVD32	Associated rail(s)
KA8-TN	Closing plug rail