


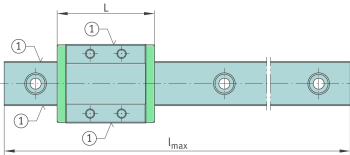


**TKDM12X2000-E-W-EWL-G2** [↗](#)

Carril perfilado

Miniature Guideway, Wide design; for
Miniature- Carriage, Wide and Wide-Long
design

Información técnica



Variante de su producto actual

Size code	12
Longitud	~2000
Version	E
Guideway design	W
Accuracy class	G2

Medidas principales y datos de rendimiento

h	8,5 mm	Height
b	24 mm	Width rail
l _{max}	2.000 mm	Max length single piece guideway
≈m	3,05 kg	Peso

Medidas de montaje

h ₁	4 mm	Longitud
j _L	40 mm	Increment
a _{L min}	6 mm	Distance between start of guideway and nearest hole
a _{L max}	34 mm	Distance between start of guideway and nearest hole
a _{R min}	6 mm	
a _{R max}	34 mm	
K ₁	M4	Thread
K1 M _A	1,1 Nm	Tightening torque