


**W60-H6-RROC**

Eje macizo

solid shafts, with axial and/or radial threaded holes

Información técnica

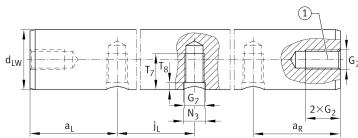

Variante de su producto actual

Size code	60	
Tolerance diameter	H6	
Material	CF53	Heat treatable steel (material no.:1.1213)
Recubrimiento	RROC	Special coating Corroctect, anti corrosion protection

Medidas principales y datos de rendimiento

d _{LW}	60 mm	Diameter Shaft
L _{max}	6.000 mm	Length total maximum
≈m	22,2 kg/m	Peso

Medidas de montaje

d _{LW Tol}	h6	Diameter Shaft
h6 Tol	0 μm	Diameter Shaft high
h6 Tol	-19 μm	Diameter Shaft low
SHD _{min}	2,2 mm	Surface Hardness Depth
t ₁	8 μm	Roundness
t ₂	13 μm	Parallelism

Medidas principales

G ₂	M16-M20-M24	Axial thread (size)
B ₀₁	M16/M20/M24	Drilling pattern axial thread one side
B ₀₂	M16/M20/M24	Drilling pattern axial thread both side