**LFS32-F** **Carril-guía**

flat solid profile, with two raceway shafts;
corrosion-resistant design possible

Información técnica**Variante de su producto actual**




Size code	32	
Ejecución	F	Flat solid profile

Medidas principales y datos de rendimiento

h	10 mm	Height
b	32 mm	Width
l_{max}	4.000 mm	Length maximum
I_y	11.300 mm ⁴	Second moment of area
I_z	2.190 mm ⁴	Second moment of area
LF_Q	230 mm ²	Cross-sectional area
W_y	810 mm ³	Wider resistance torque
W_z	438 mm ³	Wider resistance torque

Medidas de montaje

N_1	6,5 mm	Bore diameter
N_3	12 mm	Bore diameter

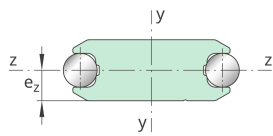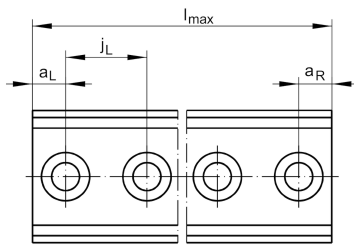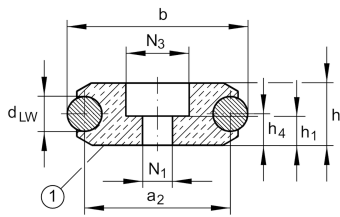



Medidas

a ₂	26 mm	Distance
a _{L max}	116 mm	Distance
a _{L min}	11 mm	Distance
a _{R max}	116 mm	
a _{R min}	11 mm	
d _{LW}	6 mm	Diameter
e _Z	5 mm	Distance
h ₁	3,5 mm	Height
h ₄	5 mm	Height
j _L	125 mm	Increment