**LFS32-M** [↗](#)

Carril-guía

hollow section profile, with fixing slots, with two raceway shafts; corrosion-resistant design possible



Información técnica



Variante de su producto actual

Size code	32	
Ejecución	M	Hollow section profile, with fixing slots

Medidas principales y datos de rendimiento

h	66,5 mm	Height
b	32 mm	Width
l _{max}	8.000 mm	Length maximum
I _y	1.000.234 mm ⁴	Second moment of area
I _z	762.105 mm ⁴	Second moment of area
LF _Q	2.206 mm ²	Cross-sectional area
W _y	26.672 mm ³	Wider resistance torque
W _z	20.707 mm ³	Wider resistance torque

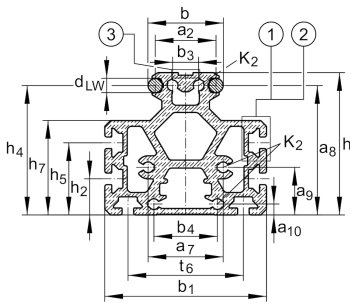



Medidas

a ₂	26 mm	Distance
b ₁	75 mm	Anchura
b ₅	10,2 mm	Width
d _{LW}	6 mm	Diameter
e _Z	36,8 mm	Distance
h ₂	25 mm	Height
h ₄	61 mm	Height
h ₇	47 mm	Height
t ₆	43 mm	Depth
t ₇	1,6 mm	Depth