**LFS52-M** [↗](#)

## Carril-guía

hollow section profile, with fixing slots, with two raceway shafts; corrosion-resistant design possible



## Información técnica



## Variante de su producto actual

Size code	52	
Ejecución	M	Hollow section profile, with fixing slots

## Medidas principales y datos de rendimiento

h	98,6 mm	Height
b	52 mm	Width
l <sub>max</sub>	8.000 mm	Length maximum
I <sub>y</sub>	3.717.250 mm <sup>4</sup>	Second moment of area
I <sub>z</sub>	3.014.470 mm <sup>4</sup>	Second moment of area
LF <sub>Q</sub>	3.691 mm <sup>2</sup>	Cross-sectional area
W <sub>y</sub>	66.380 mm <sup>3</sup>	Wider resistance torque
W <sub>z</sub>	55.462 mm <sup>3</sup>	Wider resistance torque

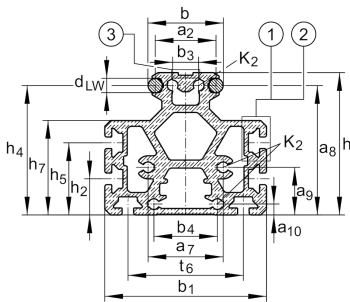



### Medidas

a 2	42 mm	Distance
a 7	52 mm	Distance
a 8	89,7 mm	Distance
a 9	33 mm	Distance
a 10	7,5 mm	Distance
b 1	112 mm	Anchura
b 3	18 mm	Width
b 4	44 mm	Width
b 5	10,2 mm	Width
d LW	10 mm	Diameter
e Z	42,6 mm	Distance
h 2	25 mm	Height
h 4	89,7 mm	Height
h 5	50 mm	Height
h 7	65,4 mm	Height
K 2	7,45 mm	Diameter
t 6	80 mm	Depth
t 7	1,8 mm	Depth