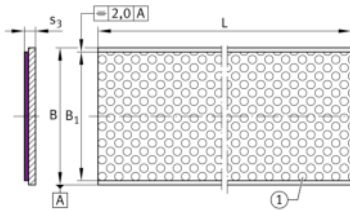


**EGS15200-E50**

Tira

Strips, low-maintenance, material in accordance with ISO 3547-4, with steel backing

Información técnica

**Variante de su producto actual**

Maintenance	Low-maintenance
-------------	-----------------

Medidas principales y datos de rendimiento

s ₃	1,48 mm	Wall thickness
B	200 mm	Width
B ₁	190 mm	Minimum usable width
L	500 mm	Strip length
≈m	0,829 kg	Peso

Medidas

s _{3min}	-0,04 mm	Wall thickness lower tolerance
s _{3max}	0 mm	Wall thickness upper tolerance
B _{min}	-2 mm	Width , lower tolerance
B _{max}	2 mm	Width, upper tolerance
L _{min}	0 mm	Total length lower tolerance
L _{max}	3 mm	Total width upper tolerance

Rango de temperatura

T _{min}	-40 °C	Temperatura mín. de funcionamiento
T _{max}	110 °C	Temperatura máx. de funcionamiento



Características



Carga radial



Lubricación con grasa



No obturado



Espacio constructivo reducido