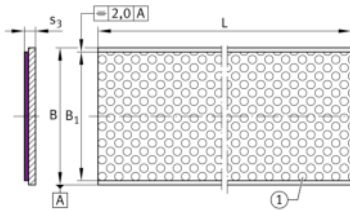
**EGS20200-E50**

Tira

Strips, low-maintenance, material in accordance with ISO 3547-4, with steel backing

Información técnica

**Variante de su producto actual**

| | |
|-------------|----------------------|
| Maintenance | Maintenance required |
|-------------|----------------------|

Medidas principales y datos de rendimiento

| | | |
|----------------|----------|----------------------|
| s ₃ | 1,97 mm | Wall thickness |
| B | 200 mm | Width |
| B ₁ | 190 mm | Minimum usable width |
| L | 500 mm | Strip length |
| ≈m | 1,213 kg | Peso |

Medidas

| | | |
|-------------------|----------|--------------------------------|
| s _{3min} | -0,04 mm | Wall thickness lower tolerance |
| s _{3max} | 0 mm | Wall thickness upper tolerance |
| B _{min} | -2 mm | Width , lower tolerance |
| B _{max} | 2 mm | Width, upper tolerance |
| L _{min} | 0 mm | Total length lower tolerance |
| L _{max} | 3 mm | Total width upper tolerance |

Rango de temperatura

| | | |
|------------------|--------|------------------------------------|
| T _{min} | -40 °C | Temperatura mín. de funcionamiento |
| T _{max} | 110 °C | Temperatura máx. de funcionamiento |



Características



Carga radial



Lubricación con grasa



No obturado



Espacio constructivo reducido